


The following slip test results for **ecodek®**, wood/plastic composite deck boards are as tested in Sep 2010 to BS7976-2: 2002. These tests have been done on clean boards. In order to maintain traction levels similar to these shown, it is imperative that the deck is designed so as to allow proper drainage and that the deck surface is kept as clean as possible.

For more information on slip testing, please go to: [www.hse.gov.uk/pubns/web/slips01.pdf](http://www.hse.gov.uk/pubns/web/slips01.pdf)

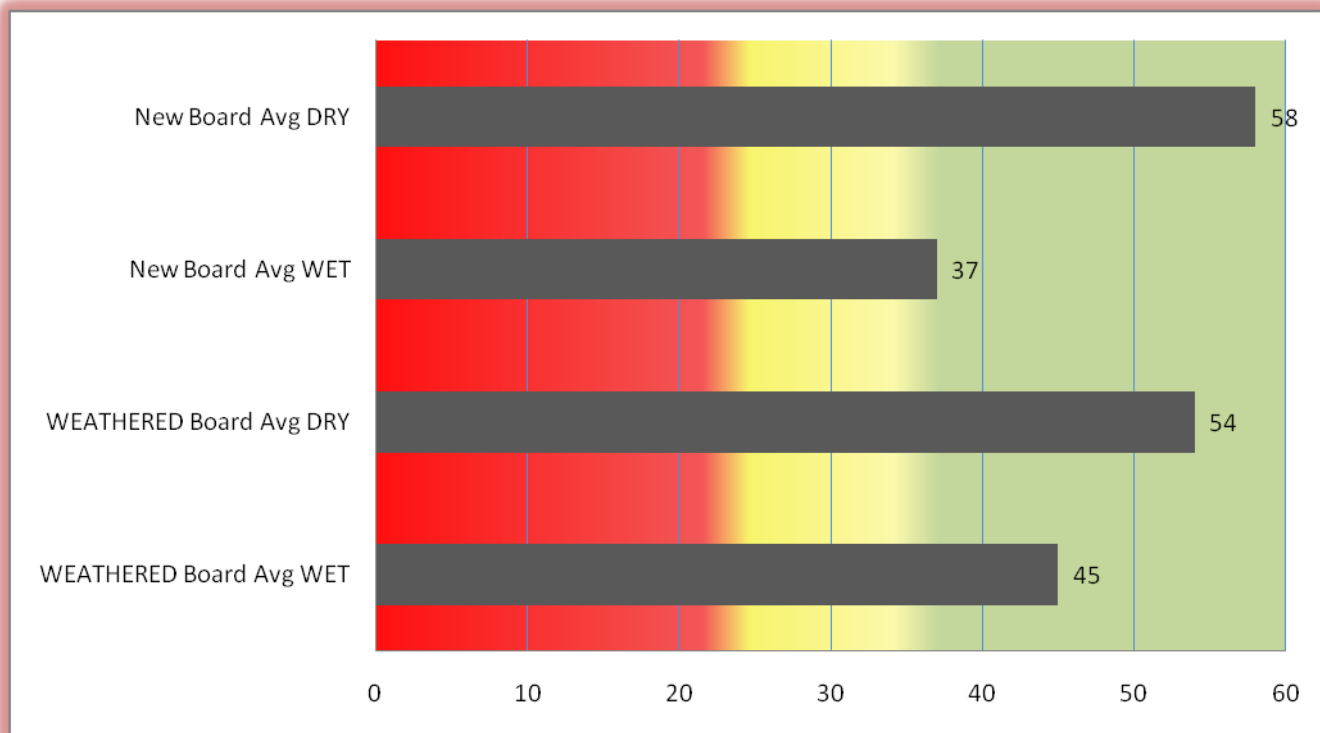

### Pendulum Test Value (4S Rubber)

	PTV
High Slip Potential	0 - 24
Moderate Slip Potential	25 - 35
Low Slip Potential	36 - 60

The grooved surface offers improved slip resistance over the ribbed surface. Although both sides of the board are classified as low potential for slip. The above results were achieved by an independent testing facility and are from samples picked at random. Because of the variable nature of the natural and recycled materials used in the manufacture of **ecodek®**, slip resistance results may vary slightly from batch to batch. When using **ecodek®** on a ramp or incline, we strongly recommend the use of anti-slip inserts as the potential for slip increases proportionally with angle of incline.

**ecodek Unit 13 Abenbury Way Wrexham Industrial Estate Wrexham LL13 9UZ**  
**Tel: 01978 667 840 Fax: 01978 667 857 Email: [enquiries@ecodek.co.uk](mailto:enquiries@ecodek.co.uk) Visit: [www.ecodek.co.uk](http://www.ecodek.co.uk)**